

SSP CONDUIT FITTINGS


Features & Benefits

- IP68 Nickel Plated Brass Straight fitting for Stainless Steel Pliable Conduit SSP Presents a Male Thread Swivel Action for ease of Installation
- HD 1250N with Very High Impact and Compression Resistance COCKATOO PROOF
- Suitable for installations where Mechanical Damage, Corrosion
- High Temperature, Flammability or Halogen may cause problems
- Working Temperature -60 to +200 Degrees



Ordering Information

PART NUMBER	DESCRIPTION
CBM12	Pliable Straight Brass Connector 12mm
CBM16	Pliable Straight Brass Connector 16mm
CBM20	Pliable Straight Brass Connector 20mm
CBM25	Pliable Straight Brass Connector 25mm
CBM32	Pliable Straight Brass Connector 32mm
CBM40	Pliable Straight Brass Connector 40mm

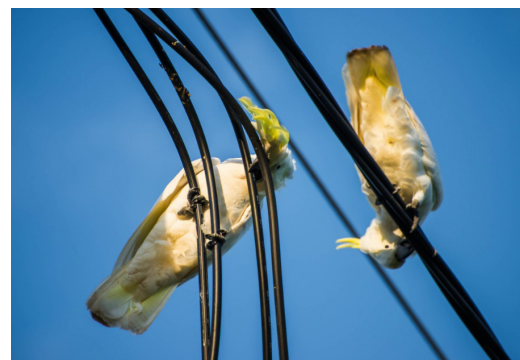

V2-0819

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.